



**View-Master®
Interactive Vision™
Television System
(VMIV)**

**Installing and Operating
Instructions**

CAUTION—ELECTRICALLY OPERATED PRODUCT:

Not recommended for children under 3 years of age.

As with all electrical products, precautions should be observed during handling and use to prevent electric shock.

AC Adapter: Input: 120 VAC, 60 Hz.

Output: 16 VAC, C.T., 800 mA.

System Requirements:

1. The VCR must be VHS format.
2. The VCR must have AUDIO OUT and VIDEO OUT jacks. Almost all VCRs are equipped with these, but you should check the back of your VCR to be sure.

If your VCR does not have AUDIO OUT and VIDEO OUT jacks, please call 1-800-292-9843, between the hours of 7:30 a.m. and 4:00 p.m. Pacific time, and you will be sent, at no cost to you, a special adapter that will enable you to connect and use the system.

Note to Parents/Guardians.....	2
Important Safety Tips.....	4
Care and Maintenance.....	5
Setting Up	6
What We Provide	6
What You Provide	7
Step-By-Step Installation	8
Abbreviated Instructions (for the technically inclined)....	9
A Note on Stereo	18
Operating the System.....	20
Starting Up	20
Starting and Stopping.....	20
Replaying an Interaction	20
Pausing.....	21
Rewinding and Fast-Forwarding	21
Adjusting Sound Levels	21
Quitting	21
Trouble-Shooting.....	22
FCC Regulations.....	24

NOTE TO PARENTS/GUARDIANS

Dear Parents/Guardians:

View-Master® Interactive Vision™ Television System (VMIV) offers a two-way television viewing experience that's both entertaining and educational. Your child will play games, construct songs and stories, and respond to questions asked by his or her favorite TV and movie characters, who will react differently according to the answers.

To help your child get the most out of VMIV, please read this booklet completely before you operate the system.

The booklet contains the following major sections:

- **SETTING UP.** VMIV connects to your VCR and TV for a one-time setup. Once connected, it remains ready to play and does not interfere with regular TV and VCR viewing. Setting up the system is very simple with most video system configurations. Pages 6-19 contain clear instructions and diagrams to help you connect VMIV to your system.
- **OPERATING THE SYSTEM.** This section explains briefly how to start, stop, pause, rewind or fast-forward VMIV. Each interactive videocassette provides instructions on the use of the Electronic Controller with its joystick and buttons. VMIV is an electrically operated product; therefore, each time your child is ready to play, we recommend that you switch on your VMIV, VCR and TV and insert the interactive videocassette. However, if your child is old enough to work a VCR, you may wish to go over the OPERATING section (pages 20-21) with him or her.

It is a good idea to re-read the OPERATING section after you have played an interactive videocassette a few times.

NOTE TO PARENTS/GUARDIANS

- **TROUBLE-SHOOTING.** In the unlikely event you have a problem in operating the View-Master® Interactive Vision™ Television System, this section provides suggestions for remedying the problem.

We also recommend that you remain with your child the first time he or she operates the system. That way, you will be able to share in the child's enjoyment as well as ensure that everything is working smoothly. We hope you and your family enjoy View-Master® Interactive Vision™ Television System and the unique interactive TV experience it provides.

Please keep these instructions handy for future reference, and remember to send in your Warranty Registration Card within ten days of purchase.

If you have any questions or problems that are not answered in this booklet, please call us at our toll-free customer service hot line, 1-800-292-9843, between the hours of 7:30 a.m. and 4:00 p.m. Pacific time.

Important Safety Tips

- **Observe Warnings.** Read all safety and operating instructions before operating the system, and all warnings on system components should be observed.
- **Power Sources.** The system should be connected only to the AC Adapter supplied with this product (see SETTING UP).
- **Object and Liquid Entry.** Care should be taken so that small objects do not fall and liquids are not spilled into system components.
- **Temperature.** System components should not be exposed to extreme heat or cold.
- **Ventilation.** Your VMIV Video Processor has ventilation openings in its cabinet to release heat generated during operation. Blocking these openings can cause heat build-up inside the unit, causing failures that may result in a fire hazard. For protection, avoid obstructing the ventilation openings with any foreign objects.







Care and Maintenance

- Do not use any Power Adapter other than the AC Adapter included with the View-Master® Interactive Vision™ Television System (VMIV).
- Always turn the Video Processor Power Switch OFF when not in use.
- It is not recommended that you unplug the Remote Control Cable from the Electronic Controller Unit once it is connected. However, if your Electronic Controller Unit needs cleaning, turn off the Video Processor and unplug the Remote Control Cable. Then you may wipe the Electronic Controller Unit with a damp cloth. (Do not spray cleaners or water on the unit.) Then plug it back in.
- Do not disassemble or attempt to repair VMIV. Doing so will automatically void all warranties.
- Periodically examine the VMIV components for potential hazards, and be sure to repair or replace any potentially hazardous parts.
- Allow proper ventilation for the Video Processor while the system is in use. Do not obstruct heat vents on the Video Processor by placing objects (magazines, newspapers, etc.) on top of it.
- During operation, do not place the Video Processor on any “soft” surface (bed, sofa, pillow, etc.) that might block the air vents on the bottom of the unit.
- Rewind all your videocassettes completely in order to keep them in the best condition.
- Store VMIV Interactive Videocassettes in their protective sleeves when not in use.

SETTING UP

Before you can set up your View-Master® Interactive Vision™ (VMIV) Television System, you should make sure you have everything you need. Pages 6 and 7 provide this information.


What We Provide

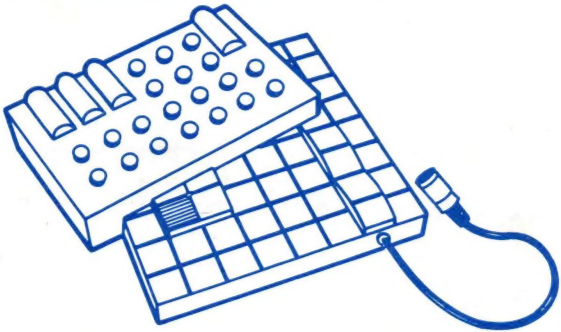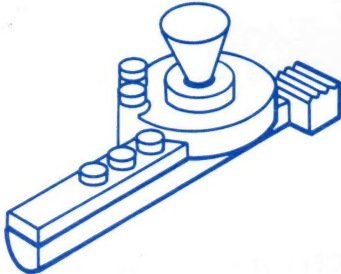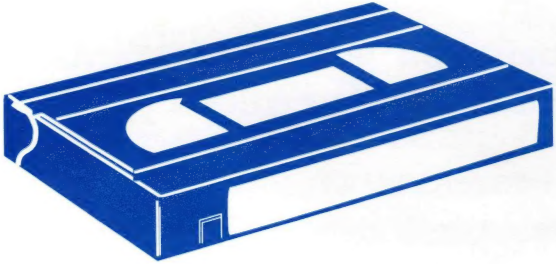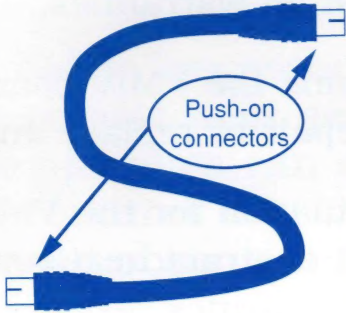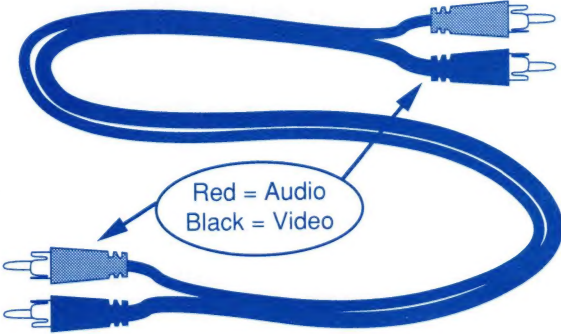 <p>A rectangular electronic device with a grid of buttons and a cable attached to the side.</p>	 <p>A small electronic component with a circular base and several pins.</p>
Video Processor with Cable Attached	Electronic Controller
 <p>A standard VHS videocassette tape.</p>	 <p>A cable with push-on connectors at both ends.</p>
VMIV Interactive Videocassette	RF Cable
 <p>A cable with two connectors, one labeled Red = Audio and one labeled Black = Video.</p>	 <p>A power adapter with a two-prong electrical plug and a connector for the system.</p>
Audio/Video Cable	AC Adapter

What You Provide



TV with VHF IN
(also called ANT in, RF in, or TV in)

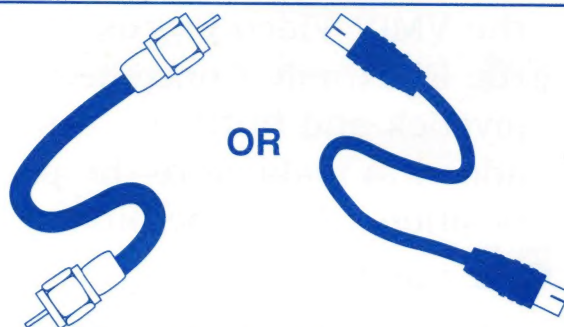

RF cable that is presently attached to the VHF OUT jack on your VCR.

Note—There are two types of RF connectors, screw-on and push-on. Either type will work fine.

Note—If your VCR does not have Audio Out and Video Out jacks, please call 1-800-292-9843, between the hours of 7:30 a.m. and 4:00 p.m. Pacific time, and you will be sent, at no cost to you, a special adapter that will enable you to connect and use the system.



VCR—1/2" VHS (not Beta), with AUDIO OUT and VIDEO OUT.

Step-By-Step Installation


1. Turn off your VCR and TV.

2. Adjust switch settings.

- Channel switches on the back of VCR and the View-Master® Interactive Vision™ Television System (VMIV) should both be set to 3 or 4.
- The TV should be tuned to the same channel (either 3 or 4).

3. Connect the Electronic Controller Unit.

Take the black cable attached to the front of the VMIV Video Processor, and attach it to the Electronic Controller Unit with its joystick and buttons. A small rib has been added to make sure the plug fits only in one position. Align the plug carefully.

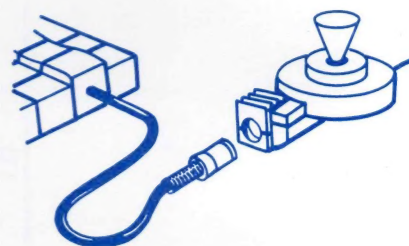

- 4. Find the cable** attached to your VCR at the jack labelled VHF OUT. (Depending on the VCR, this jack may also be called RF OUT, OUT to TV, TV OUT, or something similar.) See what the other end of that cable is attached to.

If the cable connects...


A. ...directly to your TV (for stereo TV, see D. below)	See Page 10.
B. ...to a cable converter box	See Page 12.
C. ...to a switch box to which a cable converter box, electronic game or home computer is also connected	See Page 14.
D. ...to your stereo TV, with audio and video cables also attached (Please read "A Note on Stereo," page 18)	See Page 16.

Abbreviated Instruction (for the technically inclined)

- From the viewpoint of signal flow, the View-Master® Interactive Vision™ Television System (VMIV) should always be positioned immediately after the VCR.
- When the VMIV is turned off, the RF signal is passed through (via RF IN and RF OUT) to TV without being modified.
- Interactive videocassettes are encoded for interactions. Code, graphics, and sound for the games and other interactions are passed to VMIV for processing. This data travels via AUDIO/VIDEO (RCA cables) from the VCR to VMIV.
- VMIV sends its signal to the TV via the RF cable.

Configuration A: Your VCR connects directly to your TV.


Your current configuration looks something like this:

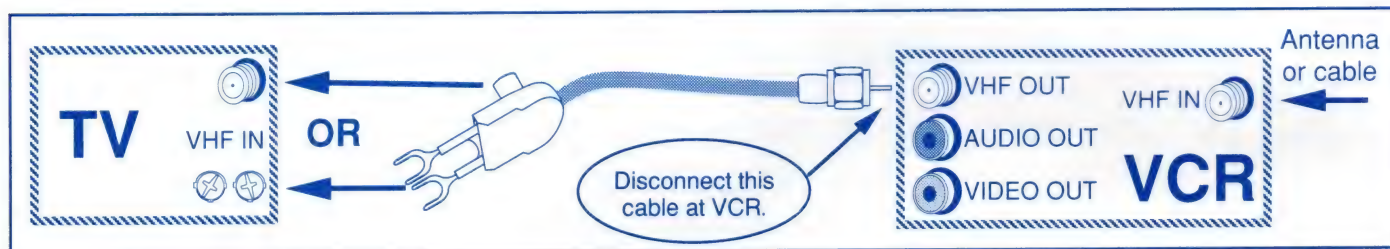

Configuration A, Without VMIV

- Disconnect the cable attached to the VHF OUT jack on the VCR.
- Attach that cable to the View-Master® Interactive Vision™ Television System as illustrated on the next page.

- Attach the other cables as illustrated below:

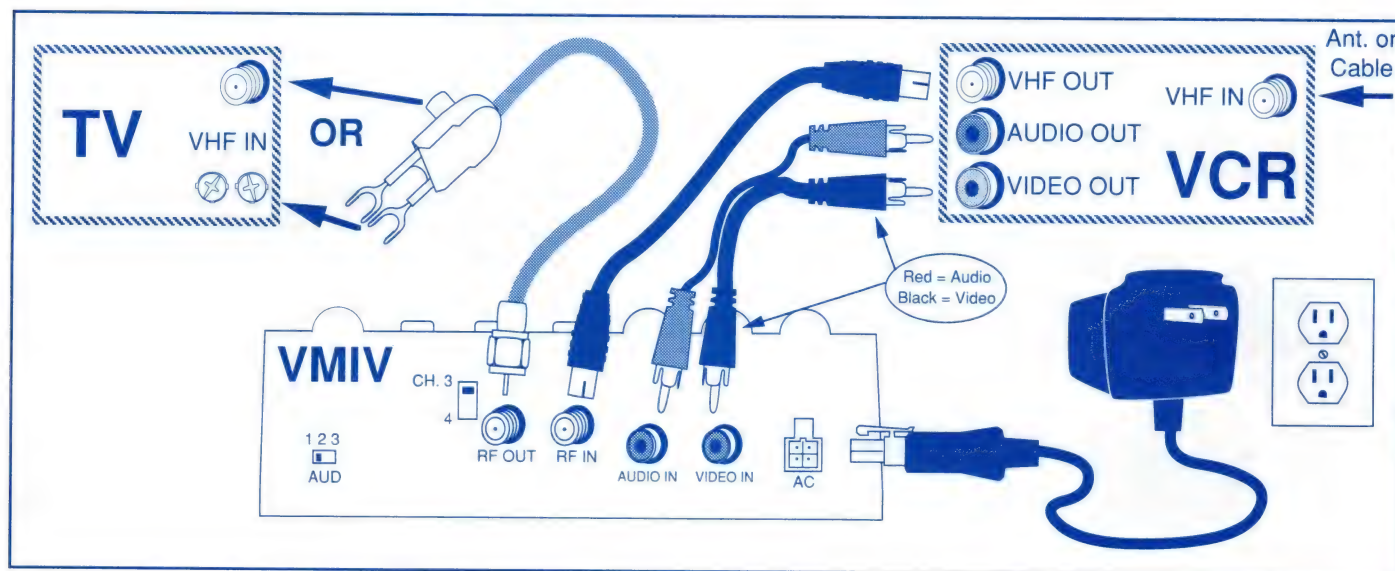


Configuration A, With VMIV Connected

SETTING UP

Configuration B: Your VCR connects to a cable converter box.


If the cable attached to the VHF OUT jack on your VCR goes to a cable converter box instead of straight to the TV, your current configuration looks something like this:

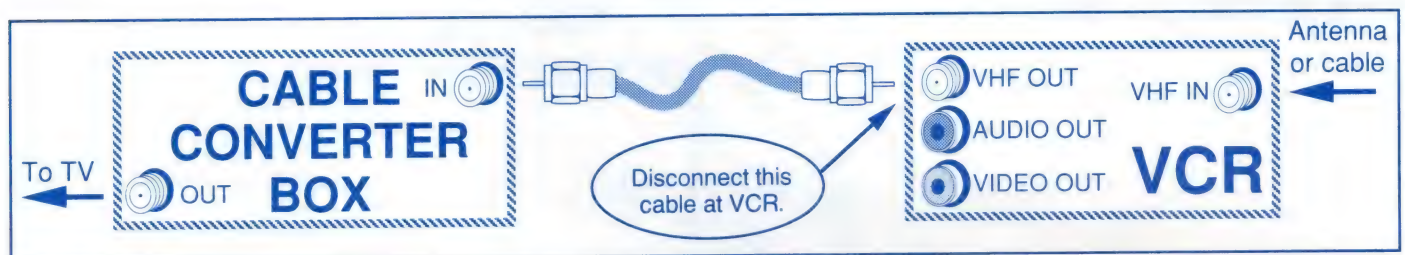

Configuration B, Without VMIV

- Disconnect the cable attached to the VHF OUT jack on the VCR.
- Attach that cable to the View-Master® Interactive Vision™ Television System as illustrated on the next page.


- Attach the other cables as illustrated below:

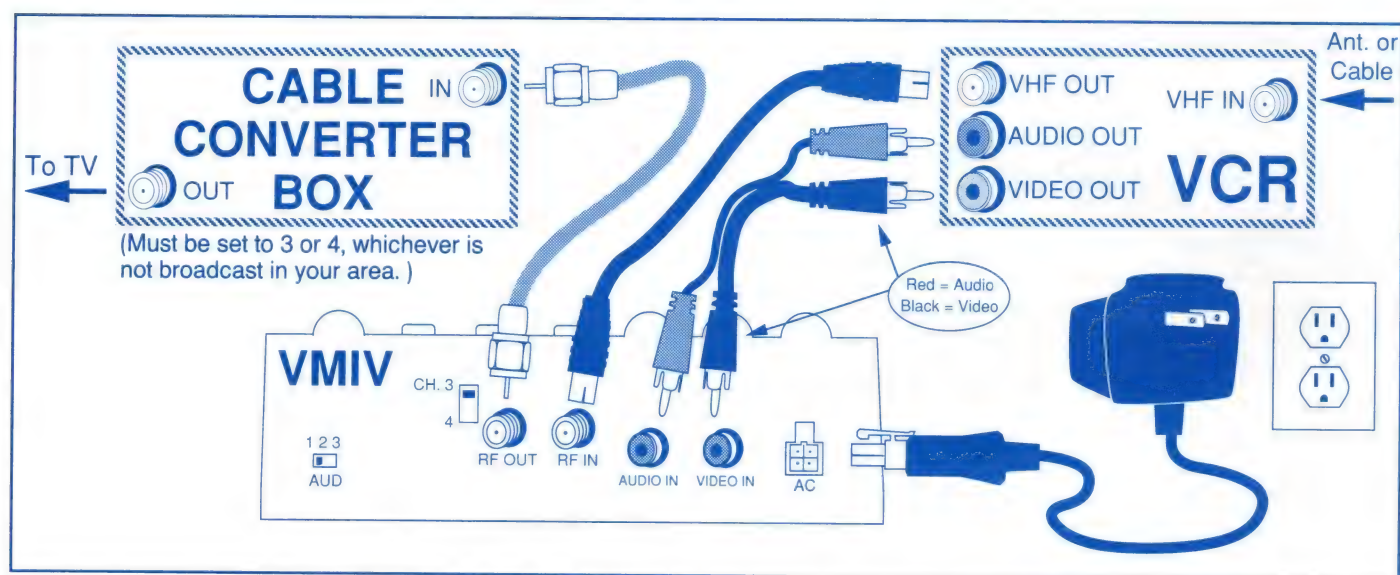

Configuration B, With VMIV Connected

Configuration C: Your VCR connects to a switch box.


If the cable attached to the VHF OUT jack on your VCR goes to a switch box instead of straight to the TV, your current configuration looks something like this:

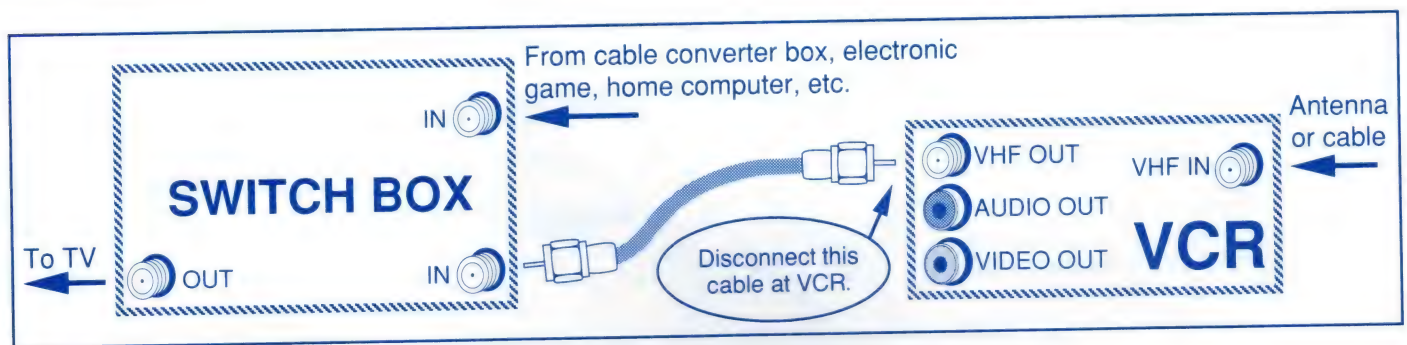

Configuration C, Without VMIV

- Disconnect the cable attached to the VHF OUT jack on the VCR.
- Attach that cable to the View-Master® Interactive Vision™ Television System as illustrated on the next page.

- Attach the other cables as illustrated below:

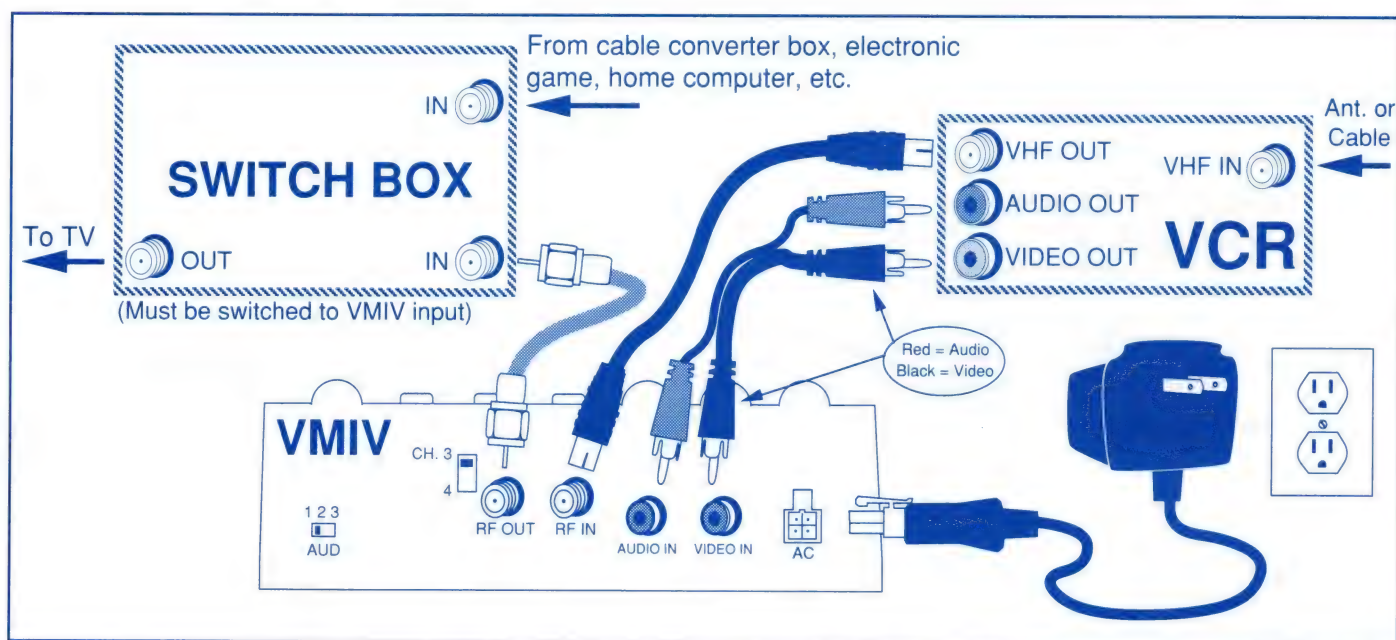


Configuration C, With VMIV Connected

SETTING UP

Configuration D: Your VCR connects to a stereo TV, with audio and video cables also attached.

If the cable attached to the VHF OUT jack on your VCR goes to a stereo TV, and you also have audio and video cables connecting the VCR to the TV, your current configuration looks something like this:

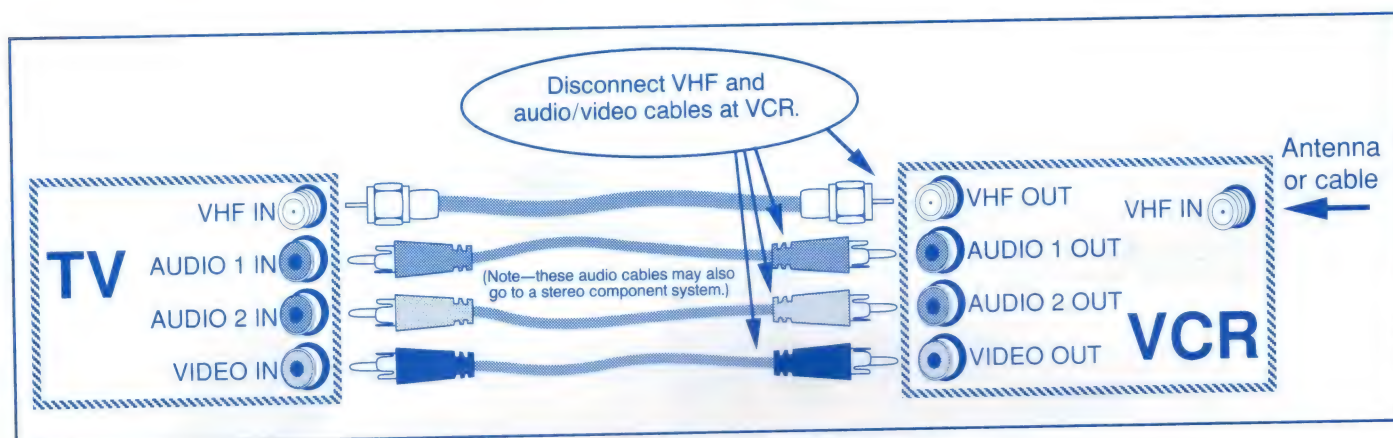


Configuration D, Without VMIV

- Disconnect the cable attached to the VHF OUT jack on the VCR. Attach that cable to the View-Master® Interactive Vision™ Television System as illustrated on the next page.
- Also disconnect the audio and video cables from the VCR. Refer to pages 18-19 for a note on how to utilize these cables to maintain stereo capability.



- Attach cables as illustrated below. (Note: To maintain stereo capability, please read "A Note on Stereo" on pages 18-19.)

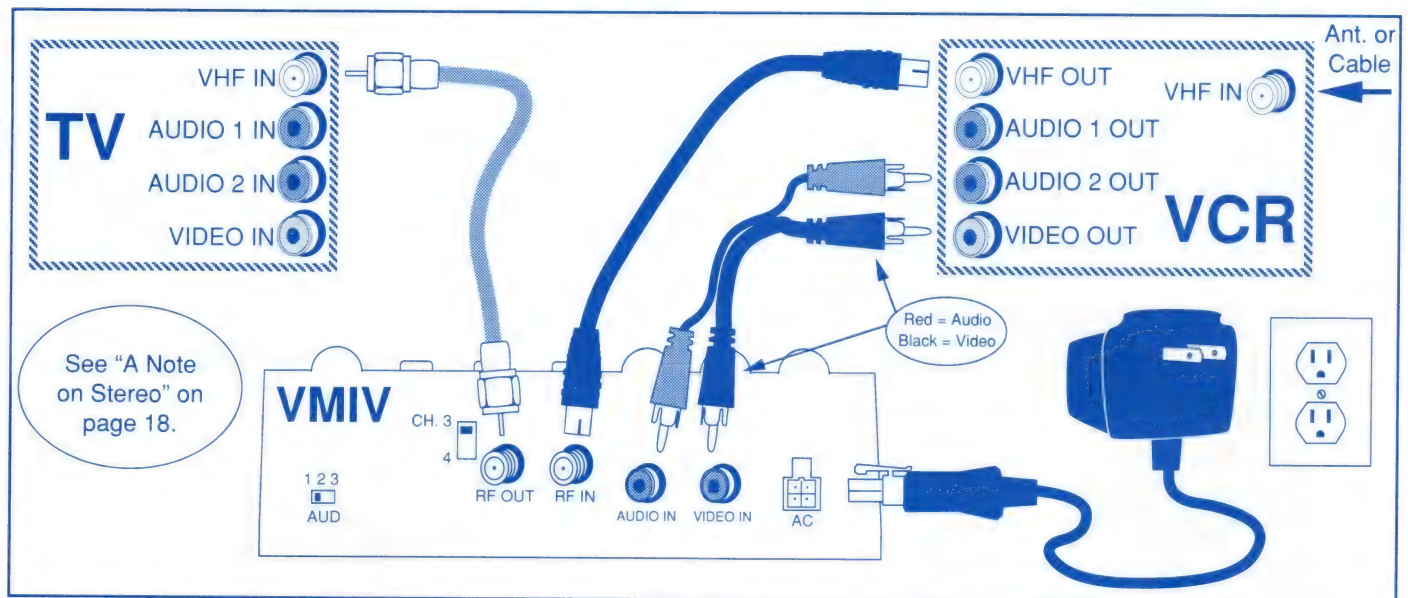


Configuration D, With VMIV Connected


A Note on Stereo

No matter what type of stereo configuration you have, you will be able to use the View-Master® Interactive Vision™ Television System (VMIV) with no problem.

- If your TV has MTS (multi-channel television sound) capability, broadcast stereo will be transmitted to the TV through the RF cable as normal.
- If your stereo or Hi-Fi TV receives its audio and video signal from the VCR's AUDIO OUT and VIDEO OUT jacks, then you can install the VMIV as diagrammed on page 17 for normal monaural operation. The VIDEO OUT and one of the AUDIO OUT signals will be diverted to the VMIV, and a monaural (or MTS) RF signal will be transmitted to the TV.
- To maintain Hi-Fi or stereo capability, you can purchase two additional, inexpensive RCA Y-connector cables (illustrated at the right) which are readily available in most consumer electronics stores. Install them as illustrated in the diagram on page 19.



A Note on Stereo (continued)

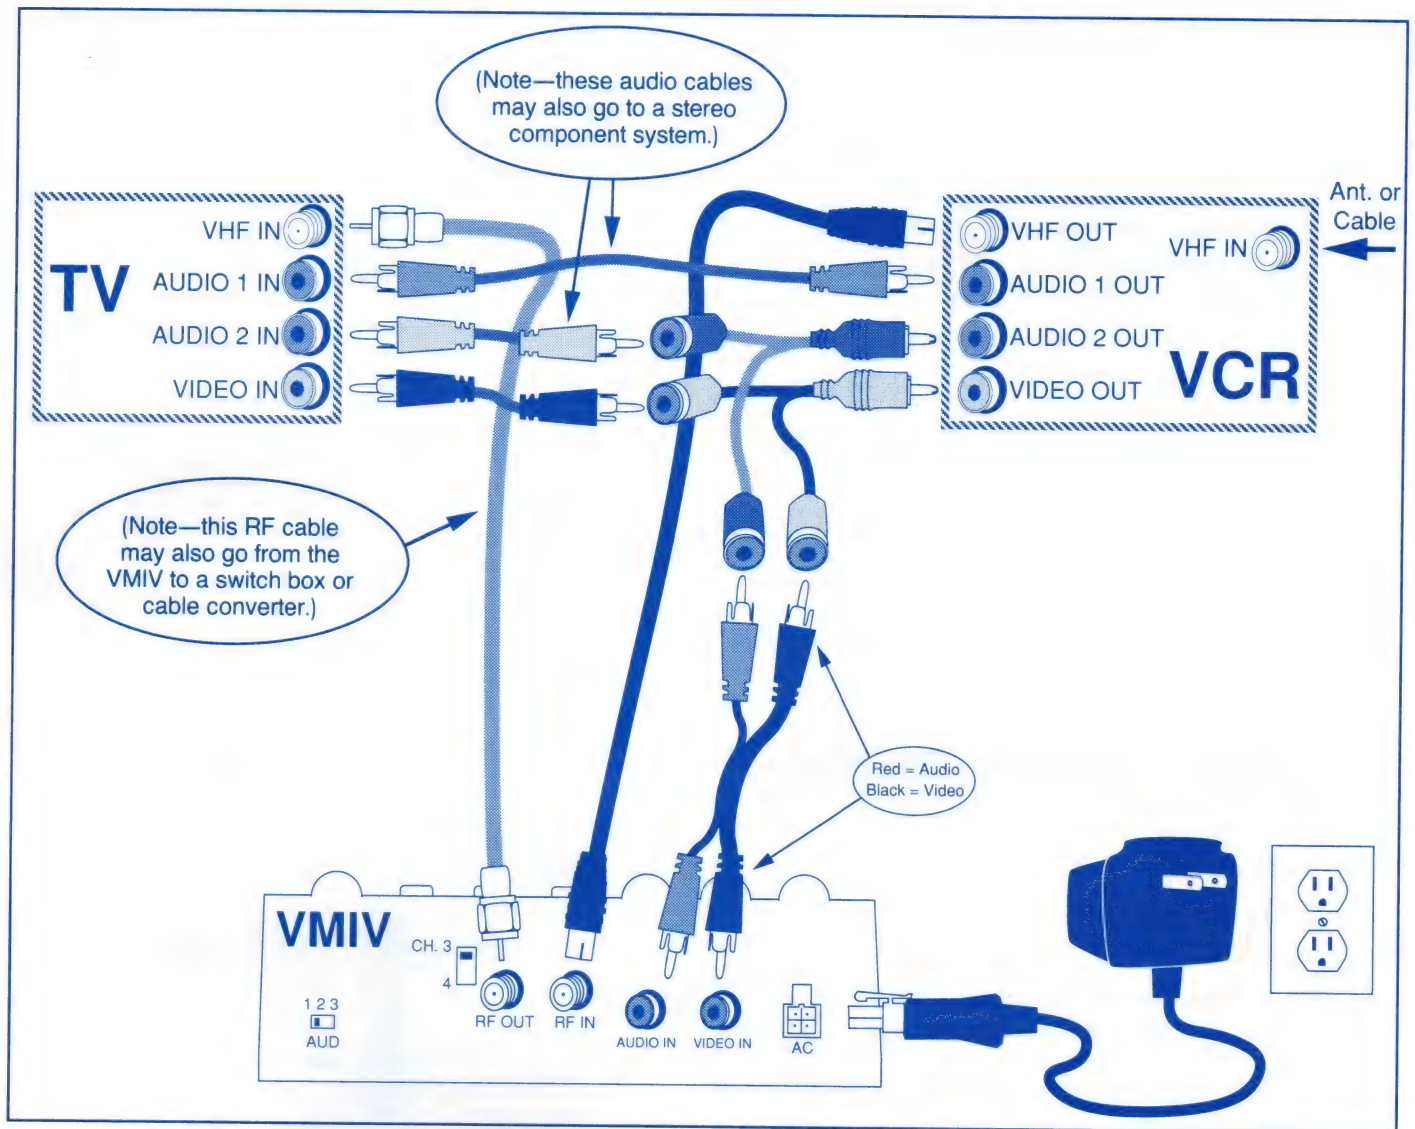


Configuration D, With VMIV and Stereo

- When the Y-connectors have been installed, you will have two different sets of input to the TV. Your TV probably has a switch in the front panel for choosing between these input options. To operate the VMIV, you will set the TV to ANT IN, VHF IN, TV IN, or RF IN, and you can simply switch to EXT IN or VIDEO IN for normal stereo operation.

OPERATING THE SYSTEM


Starting Up

1. Slide the square switch to turn the View-Master® Interactive Vision™ Television System (VMIV) on.
2. Turn the TV and VCR on. Tune the TV to channel 3 or 4, to match the switch settings on your VCR and VMIV.
3. Insert the interactive videocassette into the VCR.
4. Press "Play" on the VCR. (Note: In these operating instructions, all videotape operations, such as playing, pausing, rewinding, and fast-forwarding, apply to controls on your VCR.)
5. The first time you use any interactive videocassette, be sure to view the instructions at the beginning.

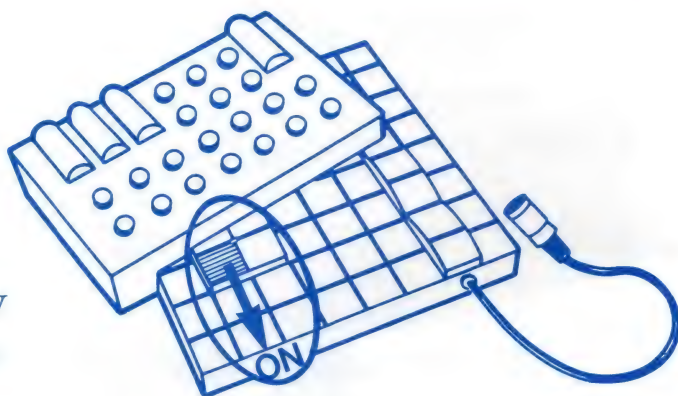

Starting and Stopping

- Yellow stripes appear on the video from time to time as indicators for good points to start or restart the tape. The best place to start or stop the tape is during the display of these yellow stripes. You can start the tape from anywhere, but if the yellow stripes are not visible at your starting point, the interactive features of the tape may not function immediately.

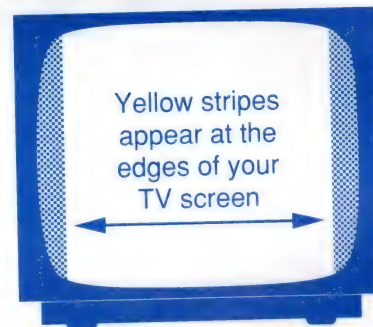

Replaying an Interaction

1. Find the interaction you want to replay.
2. Rewind the tape to the first set of yellow stripes before that interaction.
3. Play the tape at normal speed.

Pausing

- The best place to pause is when you can see the yellow stripes; the system will function normally when you resume play. If you pause at other places on the tape, some interactive features of the tape may be temporarily suspended. Remember, pausing should not be used frequently, because it will gradually degrade any videotape.

Rewinding and Fast-Forwarding

- The yellow stripes that appear on the video from time to time provide a starting point to replay an interaction. If you fast-forward or rewind the tape to a point where the yellow stripes are visible, then the interaction that starts after that stripe display will work normally.
- To replay the entire video, you should rewind to the first set of yellow stripes.
- You can rewind or fast-forward to a favorite interaction by searching until you see the yellow stripes on the screen just before that interaction begins.

Adjusting Sound Levels

- Some VCRs may require a simple adjustment to make the sound levels equal. The audio switch (on the back of the VMIV Video Processor) is factory-set to audio level 1. If during play you notice a marked difference in volume (for example, if the sound is loud and then too soft), try an audio switch setting of 2 or 3.

Quitting

- If you are done, rewind the videocassette the entire way, eject the tape, place it in its protective sleeve, and turn off the VMIV. Remember—rewinding completely will prolong the life of any videocassette.
- Your TV and VCR will now operate normally.

TROUBLE-SHOOTING

Symptom	Possible Remedy
<i>I get no picture on my TV screen.</i>	<p>Make sure the TV and VCR are both turned on and the power cords are plugged in.</p> <p>Turn the VMIV on and off; see if this has any effect on the picture. If it has no effect, your cables are not connected properly. Return to the appropriate SETTING UP diagram to double-check your cable connections.</p>
<i>I get a clear picture but no sound.</i>	<p>Check your TV volume.</p> <p>The audio cable may not be connected properly.</p> <p>Note: If your TV has a setting for HRC, this has a special encoding for the audio signal which is incompatible with the VMIV. Do not use HRC; use settings for antenna or cable (CATV). The receiving mode on your TV must be set to channel 3 or 4.</p>
<i>The audio is sometimes louder and sometimes quieter.</i>	Adjust the audio switch (on the back of the VMIV Video Processor) to a different setting.
<i>The audio makes a "crackling" sound.</i>	Adjust the tracking knob on your VCR. Refer to your VCR manual for details.
<i>The sound is sometimes on and sometimes off.</i>	Check the connections of the audio cables.
<i>Regular TV programs or VCR videos don't play.</i>	<p>Turn off the VMIV Video Processor.</p> <p>Check the configuration of the following cables: (1) The cable from VHF OUT on the VCR to RF IN on the VMIV; and (2) the cable from RF OUT on the VMIV to VHF IN on the TV. (Return to the appropriate SETTING UP diagram to double-check your cable connections.)</p>

Symptom	Possible Remedy
<i>VMIV is turned off, but my TV only works on Channel 3.</i>	Turn off your VCR.
<i>The interactive tape plays, but I can't get any interaction.</i>	Make sure the VMIV Video Processor is turned on. Make sure the Electronic Controller Unit is firmly connected to its cable.
<i>With VMIV connected, I can't get stereo on the TV.</i>	Refer to "A Note on Stereo," page 18.
<i>Interactive functions don't work.</i>	Start the interactive tape at the beginning or at the yellow stripes.
<i>Picture is fuzzy, has no color, has snow, jitters or noise lines.</i>	Make sure the switch settings on the back of the TV, the VCR, and the VMIV are all set to 3 or 4 (whichever is not broadcast in your area). If all the switch settings are on the same number, and you are still experiencing problems, you may be getting local broadcast interference. Try changing the switch settings to the alternate channel.
<i>Graphics stay on screen when VCR is rewound or fast-forwarded.</i>	Before rewinding or fast-forwarding, press "Stop" and then press "Play" on the VCR. Then rewind or fast-forward.
<i>After rewinding or fast-forwarding, interactions continue out of synchronization with the video picture.</i>	Before rewinding or fast-forwarding, press "Stop" and then press "Play" on the VCR. Then rewind or fast-forward.

Customer Support

If none of the above remedies correct the problem, call our toll-free hot line for customer service at 1-800-292-9843, between the hours of 7:30 a.m. and 4:00 p.m. Pacific time.

FCC Regulations

This system generates and uses radio frequency energy, and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing device in accordance with the specifications in Subpart H of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reposition the antenna on the radio or TV that is experiencing interference.
- Relocate VMIV with respect to the radio or TV that is experiencing interference.
- Move VMIV away from the radio or TV that is experiencing interference.
- Plug VMIV into a different outlet so that VMIV and the radio or TV are on different circuits.
- Plug VMIV into a three-prong isolation adapter (available in an electrical supply store).

View-Master® Interactive Vision™
is based upon concepts developed by ACTV, Inc.

U.S. and Foreign Patents Pending.

View-Master® Interactive Vision™ Television System
Installing and Operating Instructions
©1988 View-Master Ideal Group, Inc.
Box 100, Portland, OR 97207

Printed in U.S.A.
Assembled in the U.S.A. from domestic and foreign components.
Package labelled to show countries of origin.

VIEW-MASTER IDEAL INTERACTIVE VISION®

PROGRAM ORDER FORM

A complete library of exciting specially-programmed interactive video tapes starring children's favorite TV and movie characters is available.



Magic on Sesame Street®

Ages 3 to 6
Children help Telly Monster "perform magic" in this Sesame Street interactive video that is filled with jokes, music and tricks.




Let's Play School

Ages 3 to 6
Big Bird, Gina and Oscar tell children what it's like to be in school. While they have fun with letters, numbers, songs and stories, too!



Oscar's Letter Party

Ages 3 to 6
Oscar's having a party and Bob's having one, too. With emphasis on words and letters, children select the songs, presents and party they want to go to!

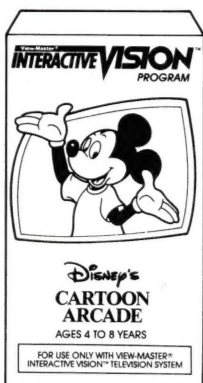


Disney's Cartoon Arcade

Ages 4 to 8
Jump into the fun as you help Mickey, Donald and Goofy out of some tricky situations! You'll win the day and the games by scoring points and solving the "Super Scrambler" bonus.



Muppets Studios Presents: "You're the Director"

Ages 5 to 8
You, the viewer, become the director of three wild and zany productions: "Anchovy & Cleopatra," "Singin' in the Meteor Shower," and "High Ruin."

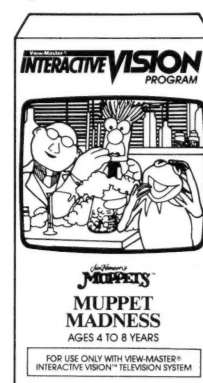

Muppet Madness™

Ages 4 to 8
Everyone will want to join in the wacky experiment of Dr. Bunsen Honeydew with Kermit, Gonzo and the rest of the Muppets, too!

... and more exciting videos to come!

The System: ©1989 View-Master Ideal Group, Inc., Portland, OR 97207.
The View-Master® Interactive Vision® Television System is based upon concepts developed by ACTV, Inc. U.S. Patent Pending. Made and printed in U.S.A.

Muppet Programs: ©Henson Associates, Inc., 1989. All Rights Reserved. JIM HENSON'S MUPPETS, MUPPETS, and MUPPET MADNESS are trademarks of Henson Associates, Inc.

Disney Program: ©The Walt Disney Company

Sesame Street Programs: ©1989 Children's Television Workshop. SESAME STREET CHARACTERS ©1989 Muppets, Inc. All Rights Reserved. Character names are trademarks of Muppets, Inc. Sesame Street and the Sesame Street sign are trademarks and service marks of CTW. This product was produced by View-Master Ideal Group, Inc. in conjunction with CTW, producers of Sesame Street. CTW has licensed material contained herein for non-commercial private use only and prohibits any other use, copying or reproduction in whole or in part. Workshop revenues from this product will be used to support CTW educational projects.

CUT HERE

To order additional Interactive Vision programs:

Fill out this coupon and mail it with your check or money order for \$24.95 (plus \$2.00 for postage and handling per video cassette).
Make payable to Interactive Vision Program Offer.

Title Selection:

Be sure to check which title you wish to receive.

- ☐ Magic on Sesame Street® ☐ Disney's Cartoon Arcade
- ☐ Let's Play School ☐ Muppet Madness™
- ☐ Oscar's Letter Party ☐ Muppets' Studios Presents:
"You're the Director"

Please send me the _____ Interactive Vision Program(s) indicated

above. My payment for \$_____ is enclosed.

PLEASE PRINT CLEARLY. THIS IS YOUR SHIPPING LABEL.

Name _____

Address _____

City _____ State _____ Zip _____

Mail To: **Interactive Vision Program Offer**
Post Office Box 888
Portland, OR 97207

No cash or stamps please. Allow 4 weeks for delivery.
Offer good in Continental U.S.A. only. Void where prohibited by law.

7. Please indicate the three most important reasons for choosing this product:


(1 = Most important; 2 = Second most important; 3 = Third most important)

- ☐ Child likes Sesame Street®/Disney characters
- ☐ Child can operate alone
- ☐ Interesting/unique to child
- ☐ Variety of programs
- ☐ Educational value
- ☐ Keeps child entertained
- ☐ Manufacturer's reputation
- ☐ Good value for the money

Other comments:

Thank you.

(Fold here)



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES


BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. A-122 PORTLAND, OREGON

POSTAGE WILL BE PAID BY ADDRESSEE

**VIEW-MASTER® INTERACTIVE VISION™
TELEVISION SYSTEM**

Post Office Box 888
Portland, OR 97207-9955



**View-Master®
INTERACTIVE VISION™**
The Two-Way Television System

**LIMITED WARRANTY AND
REGISTRATION**

IMPORTANT!

The enclosed warranty is your protection in the unlikely event of any mechanical and/or electronic difficulties encountered during use of your VIEW-MASTER® INTERACTIVE VISION™ TELEVISION SYSTEM (the Product).

Please take a few moments now to familiarize yourself with it, then fill out and mail the accompanying Warranty and Questionnaire. We have already paid the postage.

If you have any questions on how to obtain Warranty Service for this Product, please call us Toll-free at 1-800-2-WAY-VID. Ask for the Customer Service Department.

Over the years, View-Master has come to depend upon consumer input in an effort to continually improve our products and services. Your comments will help us better serve your needs and the needs of your children.

Thank you,

**Director of Customer Service
View-Master Ideal Group, Inc.**

VIEW-MASTER IDEAL GROUP, INC.

Limited Warranty

VIEW-MASTER IDEAL GROUP, INC. (View-Master) warrants to the original consumer purchaser of VIEW-MASTER® INTERACTIVE VISION™ TELEVISION SYSTEM (the Product) for a period of ninety (90) days from the date of purchase that the mechanical and electronic components of this Product are free from defects in materials or workmanship. Defective product returned by the purchaser to View-Master with dated proof of purchase within that ninety-day period will be repaired or replaced free of charge, provided that the returned Product has not been subjected to abuse, unreasonable use, mistreatment, tampering, neglect or excessive wear.

To qualify for repair or replacement, defective Product must be returned to View-Master, with dated proof of purchase, postage paid and in protective packaging to the VIEW-MASTER® INTERACTIVE VISION™ TELEVISION SYSTEM Service Center in the country of purchase:

U.S.A.:

View-Master Ideal Group, Inc.
8585 S.W. Hall Boulevard
Beaverton, OR 97005

CANADA:

View-Master Ideal (Canada), Inc.
5630 Tomken Road
Mississauga, Ontario
Canada, L4W 1P4

If repair of the Product is made or attempted by any one other than View-Master, your warranty may be voided.

This warranty applies only to the original purchaser whose warranty registration card has been completed and mailed within ten days of purchase.

Be sure to include a dated proof of purchase and a letter with your name and address describing the problem.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, WHETHER ORAL OR WRITTEN, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR ANY PARTICULAR PURPOSE. CONSEQUENTIAL OR INCIDENTAL DAMAGES RESULTING FROM A BREACH OF ANY APPLICABLE WARRANTY ARE HEREBY EXCLUDED.

Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

© 1988 View-Master Ideal Group, Inc. The View-Master® Interactive Vision™ Television System is based upon concepts developed by ACTV, Inc. U.S. Patent Pending.
© 1988 Children's Television Workshop. © 1988 The Walt Disney Company.

Printed in U.S.A.

Rev. 2/17/89 106-061-01

VIEW-MASTER® INTERACTIVE VISION™ TELEVISION SYSTEM WARRANTY REGISTRATION

Check One Item Number ☐ 7150 ☐ 7160

In the interest of continuous improvements of our View-Master® products, we would like to have your comments. Please complete the Questionnaire below, detach, and mail. Postage is prepaid.

Name _____
Address _____
City _____
State _____ Zip _____
Telephone _____
Date of Purchase/Receipt _____

QUESTIONNAIRE

1. Where did you buy this product?

Type of Store: ☐ Department ☐ Toy ☐ Other _____

Retailer Name _____

☐ Unknown — Received as a Gift Please answer #4

2. Who made the decision to purchase the View-Master® Interactive Vision™ Television System?

☐ mother only ☐ mother and father ☐ friend
☐ father only ☐ grandparent(s) ☐ other _____

3. What made you decide to buy this product?

☐ Magazine Ad

Which Magazine _____

☐ TV Ad

☐ Friend

☐ In-Store Display

☐ Relative

☐ Sesame Street®/Disney video cassette in-packed

☐ Other _____

4. What is the age and sex of the child this product was purchased for?

Sex ☐ Male

Age

☐ under 3 years

☐ 3 to 4 years

☐ 4 to 5 years

☐ 5 to 6 years

☐ 6 to 7 years

☐ over 7

☐ Female

5. Which of these magazines do you read regularly?

☐ Essence

☐ Good Housekeeping

☐ Redbook

☐ Parenting

☐ Others _____

☐ Parents

☐ Woman's Day

6. What is your approximate annual household income?

☐ under \$15,000

☐ \$25-\$35,000

☐ \$15-\$25,000

☐ \$35-\$50,000

☐ \$50-\$75,000

☐ over \$75,000

(Tape or staple to seal here)